


SF₆ Electrical Discharge By-products

Column: GS-GasPro
60 m x 0.32 mm I.D.
J&W P/N: 113-4362
Carrier: Helium at 37 cm/sec (2.0 mL/min),
measured at 80°C
Oven: 80°C for 2 min
80-200°C at 20°/min
Injector: Split 1:50,
225°C, 10 µL injection of SF₆ standard
Detector: MSD, 280°C transfer line
Full scan of m/z 44-150

*Standard mixture courtesy of Dr. Phillip Curb and Analytical
ChemTech International, Inc.*

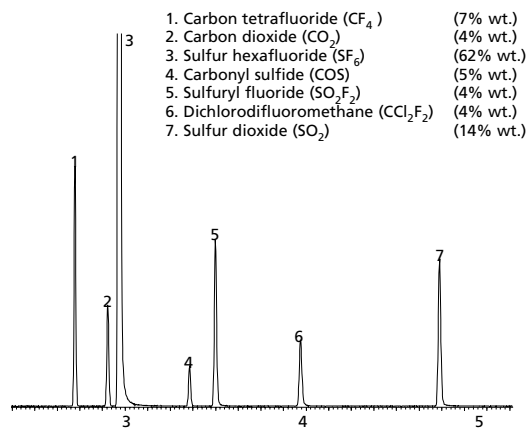

C654