

Petroleum Wax

Column: DB-1
15 m x 0.32 mm I.D., 0.25 μ m

J&W P/N: 123-1012

Carrier: Hydrogen at 4 mL/min

Oven: 60°C for 1 min

60-325°C at 8°/min

325-350°C at 5°/min


Injector: Cool On-column, 1.0 μ L

1.5 WT% in cyclohexane

Detector: FID, 400°C

Baseline Compensated

1. Hexadecane
2. Eicosane
3. Tetracosane
4. Octacosane
5. Dotriacontane
6. Hexatriacontane
7. Tetracontane
8. Tetratetracontane
9. Pentacontane

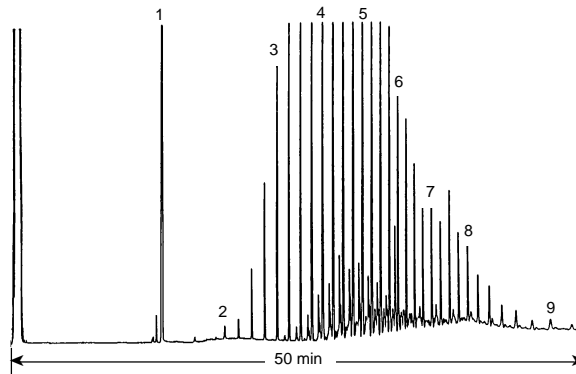

C170