

Agilent Labware Stacker

Data Sheet



Applications

1. Small footprint for space-limited labs
2. Ultra-compact storage and dispensing of tip boxes
3. Pin tools or up to 60 ANSI-compliant microplates
4. Automated systems using articulated arm robots

Introduction

The Agilent Labware Stacker makes storing and dispensing microplates fast and easy. The Labware Stacker is a sophisticated device for dispensing and receiving microplates from robotic systems. An efficient modular unit, the Labware Stacker provides the compact size and speed demanded in today's automated systems. The Labware Stacker features removable racks for convenient access to microplates. Its versatile design accommodates all types of microplates (including deep well microplates) as well as pipette tip boxes and pin tools. The Labware Stacker's compact size allows for multiple stackers to be used in your system, increasing the speed and efficiency of your automated protocols.



Agilent Technologies

Features & Benefits

System Features

- Standard Rack**
 Standard rack design allows convenient operator access for loading and unloading microplates. Top-load and front-load racks available in various sizes (contact Agilent).
- Deep well blocks are compatible with the Labware Stacker.
- Racks can also accommodate pipette tip boxes, pin tools, and filter microplates.
- User Interface**
 The Labware Stacker is intended to be routinely used for automated runs controlled by platform software. If you are using the Agilent BioCel System, the platform software is Agilent VWorks Automation Control software. If you are running the Labware Stacker in a system developed by your own organization, the platform software will need to be custom written using a program such as C++ or Visual Basic and Agilent's ActiveX software.
- Rack Capacity**
 The following is a table of basic microplate types and their capacity in the Labware Stacker rack. This is a general guideline only. For rack capacity for specific microplate types, contact Agilent.

Microplate Type	Standard Rack Capacity
Assay (without lid)	50
Assay (with lid)	42
Thermal cycling (no seal)	88
Tip box	11
Deep well (2.2 mL)	15
Deep well (1.2 mL)	24

For additional detailed information on labware racks, please see **Agilent Labware Racks**, PUB 5990-4089EN.

Benefits

- Small Footprint**
 Compact size allows for multiple stackers, increasing speed and efficiency.
- Smart Design**
 Automatically checks for correct microplate type and orientation.
- Variety of Storage Racks
- Accommodates racks of different sizes and styles.

Specifications

Electrical: 100-240 VAC, 50/60 Hz, Operating AC Current 1.2A/120V or 72A/240V (typical), Inrush Current 20A/120V or 40A/240V (typical)

Operating Temperature: 4–40 °C; 10–90% RH, non-condensing

Air: 28 Lpm at 5.5 bar (<1 cfm at 80 psi)

Software: Includes ActiveX Control CD

Interface: RS-232 serial port with DB9 pin connector


Rack Dimensions: W 3.5 in x D 5.25 in x H 26.75 in (Standard Rack)

Certification: CE certified and built to meet UL standards

Dimensions

Width: 20.3 cm [8 in]
 Depth: 22 cm [8.5 in]
 Height: 19 cm [7.5 in]
 Weight: 6.1 kg [13.5 lbs]

Note: Height does not include rack height.

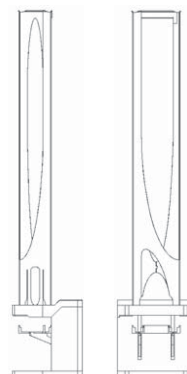

Part No.	Description
G5407A	Labware Stacker, Standard
G5407A Option 60	Standard Rack; 860mm
G5407A Option 61	Top Loading Rack; 250mm
G5407A Option 62	Top Loading Rack; 460mm
G5407A Option 63	Top Loading Rack; 660mm
G5407A Option 64	Top Loading Rack; 860mm
G5407A Option 65	Front Loading Rack; 250mm
G5407A Option 66	Front Loading Rack; 460mm
G5407A Option 67	Front Loading Rack; 660mm
G5407A Option 68	Microtube Rack; 660mm

www.agilent.com/lifesciences/automation

Agilent Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Information, descriptions, and specifications in this publication are subject to change without notice.

© Agilent Technologies, Inc. 2010
 Published in the USA
 April 19, 2010
 5990-5714EN



Agilent Technologies