




Agilent Bravo BenchCel Workstations

Data Sheet

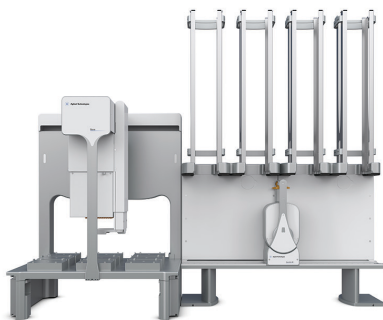

Agilent Bravo BenchCel Workstation

Specifications

Computer/Software requirements

Host computer	Windows 10 64-bit operating system (included)
Software	Agilent VWorks Automation Control Software (included)

Available system configurations

Base platform	Bravo Automated Liquid Handling Platform with BenchCel Microplate Handler (available with and without 146 mm risers)
BenchCel options	2R, 4R, or 6R
Integrated Agilent devices	PlateLoc Thermal Microplate Sealer (available with and without 146 mm risers) Microplate Barcode Labeler (available with and without 146 mm risers) PlateLoc Thermal Microplate Sealer over Microplate Barcode Labeler (available with and without 146 mm risers) PlateLoc Thermal Microplate Sealer over Microplate Centrifuge (available with and without 146 mm risers)

Labware compatibility

Microplates	Meets ANSI/SBS 1-2004 through ANSI/SBS 4-2004 labware standards (microplates, deep-well microplates, tube racks, vial racks, pipette tip boxes, and some common filter plates)
-------------	--

Available labware racks

Top loading	660 mm or 860 mm
Front loading	250 mm or 660 mm

Operating requirements

Air	70 LPM at 6.2 bar (2.5 cfm at 90 psi) [Clean, dry, oil-free]
Electrical	100–240 V~ 50/60 Hz
Environment	4–40 °C; 20–90 % RH, noncondensing

[www.agilent.com/chem/
BenchCelWorkstation](http://www.agilent.com/chem/BenchCelWorkstation)

For Research Use Only.
Not for use in diagnostic procedures.

This information is subject to change without notice.

© Agilent Technologies, Inc., 2017
Published in the USA, July 25, 2017
5991-8289EN



Agilent Technologies