

# Agilent HLD BR15 Bench Helium Leak Detector



## Precise, powerful, and easy to use

The Agilent HLD BR15 bench helium leak detector is both a precise instrument and a robust workhorse, featuring an easy-to-use touch screen interface and menu structure that quickly connects users to powerful leak detection capabilities. Built-in application setups shorten test cycles and can be saved to assure repeatability. It fits easily on a table, bench, or cart, and comes with the Agilent DS 302 rotary vane backing pump, with a pumping speed of 15 m<sup>3</sup>/hour.

The HLD BR15 was designed to bring unprecedented ease to the optimization of leak detection performance for any application—no more guessing, wasted time, or costly mistakes.

### Features

- Six different application setup guides help you correctly configure your instrument for the best performance, ensuring that parameters are properly set for a thorough and efficient test.
- Larger, more durable and responsive touch screen interface rotates 180° for ideal viewing.
- Cleaner, more intuitive user interface. Immediate access to frequently used features and a flat menu structure allow you to quickly find the setting you need.
- Startup wizard helps user set up the instrument on first-time power-up.
- Enhanced charting capabilities: Zoom for closer inspection of data, color-coded setpoints, and time-based plot records for leak rate and pressure.
- A large work surface provides plenty of room for parts to be tested, tools, etc.
- Improved power-off process keeps spectrometer under vacuum and protects the turbomolecular pump.

## Easy navigation via the large touch screen interface

Test status view


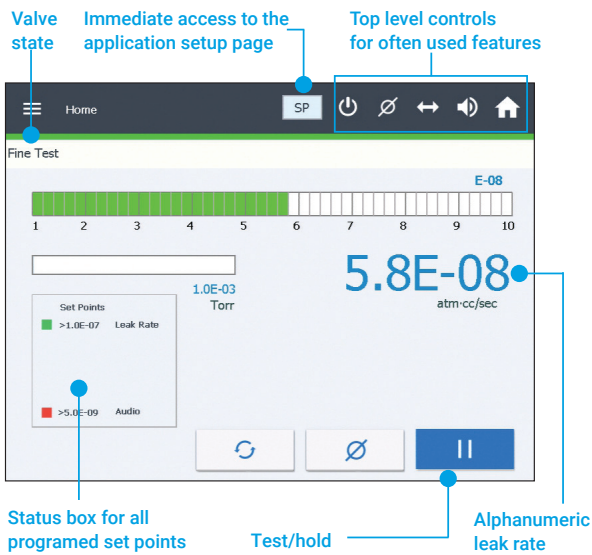


Chart view



Two home screen views offer test or data interpretation to suit your needs.

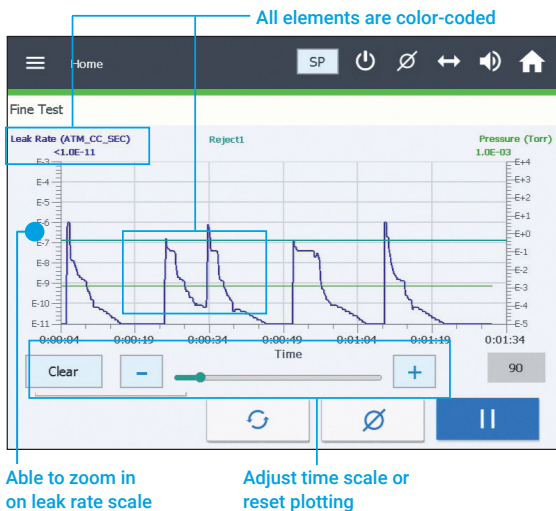

The HLD BR15 comes with the Agilent DS 302 rotary vane backing pump and associated connecting hardware.

DE.5160763889

This information is subject to change without notice.

© Agilent Technologies, Inc. 2020  
Printed in the USA, May 14, 2020  
5991-9053EN

## Specifications

Primary pump and pumping speed	DS 302 rotary vane pump, 15 m <sup>3</sup> /hour
Detectable mass	4
Pumping speed for helium	1.8 l/s
Sensitivity	5 × 10 <sup>-12</sup> mbar l/s
Display range	10 <sup>-4</sup> – 10 <sup>-11</sup>
Maximum test port pressure	13 mbar
Accessory	Wireless remote
Eight languages	Chinese, English, French, German, Japanese, Korean, Russian, Spanish
Interface options	Analog, RS232, and discrete IO

## Ordering information

Description	Part No.
Agilent HLD, BR15 configuration	G8612A
<b>Configured Options</b>	
Discrete IO interface	#101
Wireless remote, base unit	#102
1-1/8 inch compression test port	#104
Test fixture cable	#105
Harsh Environment Probe	#106
<b>Accessories</b>	
Wireless remote	G8600-60002
Power Probe sniffer 10 ft.	K9565306
Power Probe sniffer 25 ft.	K9565307
Universal test fixture (flapper box)	VSFLDFBNW25

Agilent has a global network of service professionals and a wide array of support options that will:

- Protect your investment
- Maximize your productivity
- Ensure your instrument is fully compliant with industry regulations

For more information, please contact your Agilent representative or visit [www.agilent.com/en/products/vacuum-technologies/leak-detection](http://www.agilent.com/en/products/vacuum-technologies/leak-detection)