


HS-2 Oil Diffusion Pump

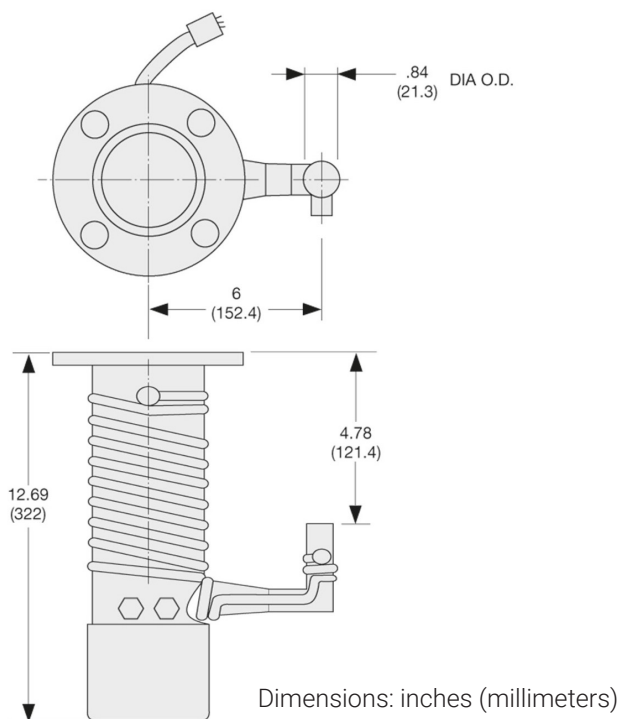

Download 3d drawings [here](#).

The Agilent HS-2 oil diffusion pump provides high throughput and high pumping speeds of 160 L/s for air and 200 L/s for He and H₂. With its fully optimized vapor jet and robust boiler design, the pump will run without any maintenance for years. It is available with an ASA inlet flange and with 120 V or 240 V.


This diffusion pump is an excellent fit for instrumentation applications such as gas chromatography mass spectrometry (GC/MS), short path distillation systems, and centrifuges.

Technical specifications

Pumping Speed, Operating Range	160 L/s air, 200 L/s He and H ₂
Pumping Speed, AVS 4.1 (1963)	285 L/s air
Maximum Throughput	0.60 T-L/s (0.80 mbar-L/s) in operating range, 0.70 T-L/s (0.93 mbar-L/s) at 0.01 Torr
Operating Range	3.7×10^{-3} to $<5 \times 10^{-8}$ Torr (4.9×10^{-3} to $<6.5 \times 10^{-8}$ mbar)
Maximum Forepressure	No load: 0.55 Torr (0.71 mbar) Full load: 0.40 Torr (0.52 mbar)
Recommended Backing Pump	≥ 5 cfm (8.5 m ³ /hr)
Backstreaming Rate, Standard Cold Cap	$<1 \times 10^{-3}$ mg/cm ² /min
Warmup Time	15 minutes
Cooldown Time	10 minutes (with quick cool coil)
Fluid Charge	100 cc
Electrical Requirements	1 ph, 50/60 Hz, 120/240 VAC
Pump Power	450 watts
Cooling Water Requirements	0.1 gpm (20 L/hr) at 60 to 80 °F (15 to 26 °C)
Water Connections	½ in FPT
Recommended Holding Pump*	DS40M Rotary Vane Pump

* Recommended holding pump sizes are based on estimates; assuming good vacuum practice in system design and operation. Results may vary from system to system.

Performance specifications based on tests done with DC704.

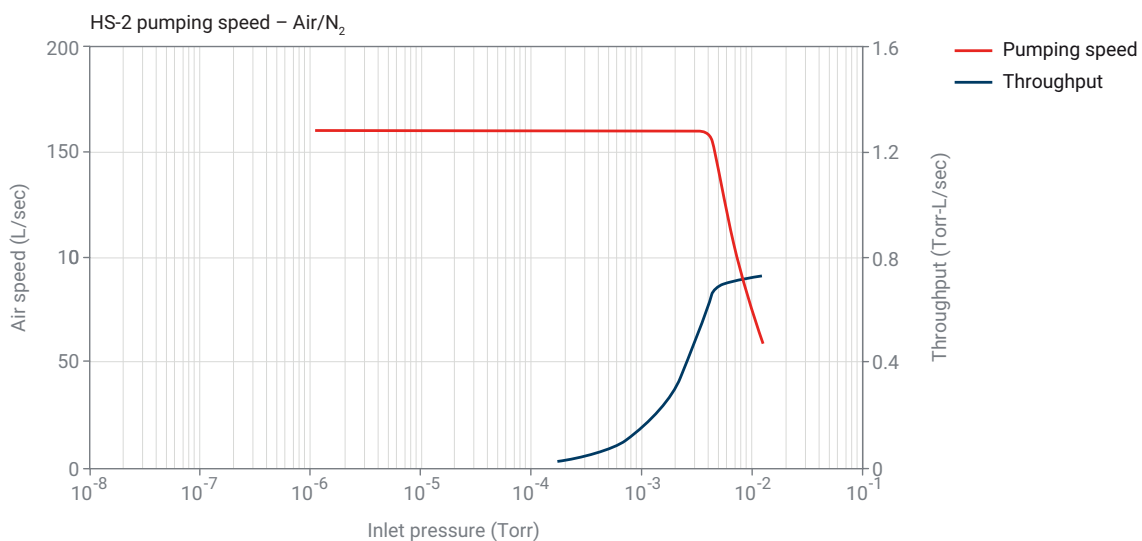

Ordering information

Description	Weight kg (lb)	Part Number
ASA		
HS-2 with Standard Cold Cap, 120 V	20.0 (9.0)	82906301
HS-2 with Standard Cold Cap, 240 V	20.0 (9.0)	82906302
Santovac 5 Diffusion Pump Fluid, 500 cc	2.5 (1.1)	695405005
Replacement Parts (One Heater Required Per Pump)		
450 W, 120 V Heater	1.0 (0.5)	647302125
450 W, 240 V Heater	1.0 (0.5)	647302150
Heater Block (One Required Per Pump)	1.0 (0.5)	82920001
Heater Platen (One Required Per Pump)	1.0 (0.5)	82918301
Replacement O-Ring Kit, (Five Inlet Flange O-Rings)	1.0 (0.5)	K0377159

- Inlet flange: nominal 2 in. ASA flange with 6 in. od.
- Foreline: 0.84 in. diameter tube.

Contact information

Americas

Agilent Technologies
121 Hartwell Avenue,
Lexington, MA 02421 USA
Toll free: +1 800 882 7426
vpl-customer@agilent.com

Europe, Middle East, Africa, India

Agilent Technologies Italia SpA
Via F.lli Varian 54,
10040 Leini (Torino), Italy
Tel: +39 011 9979 111
Toll free: 00 800 234 234 00
vpt-customer@agilent.com

China

Beijing Office Agilent Technologies
(China) Co. Ltd.
No.3, Wang Jing Bei Lu,
Chao Yang District,
Beijing, 100102, China
Toll free: 800 820 6778
Contacts.vacuum@agilent.com

For more information, please contact
your Agilent representative or visit
www.agilent.com/chem/vacuum where
you can chat live with a vacuum expert.



www.agilent.com/en/product/vacuum-technologies/diffusion-pumps/small-diffusion-pumps/hs-2-diffusion-pump

DE44326.5694907407

This information is subject to change without notice.

© Agilent Technologies, Inc. 2021
Printed in the USA, July 22, 2021
5994-3466EN