



# **Agilent 6500 Series Q-TOF LC/MS**

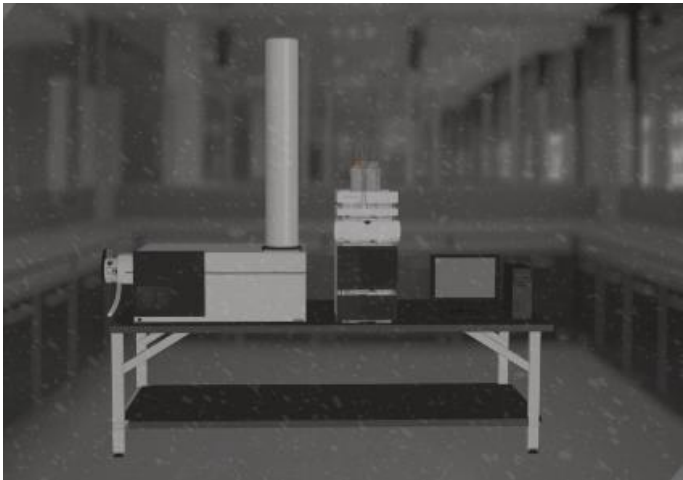
## **Site Preparation Guide**



**Agilent**

| Trusted Answers

## **Airborne dust**

1	<p>Agilent recommends a maximum airborne particle density of 55 mg/m<sup>3</sup>. If you suspect your site exceeds this limit, contact your local Agilent Customer Service Organization. They can offer suggestions for reducing airborne dust.</p>	
2	<p>Agilent recommends a maximum airborne particle density of 55 mg/m<sup>3</sup>. If you suspect your site exceeds this limit, contact your local Agilent Customer Service Organization. They can offer suggestions for reducing airborne dust.</p>	